


# Standard Custom ElectroMechanical Switches

Stocked EM **Standard EM** Custom EM Standard PIN Multi-Throw PIN High Power PIN Switched Attenuators Switched Filter Banks Limiters

## Power Handling Capability

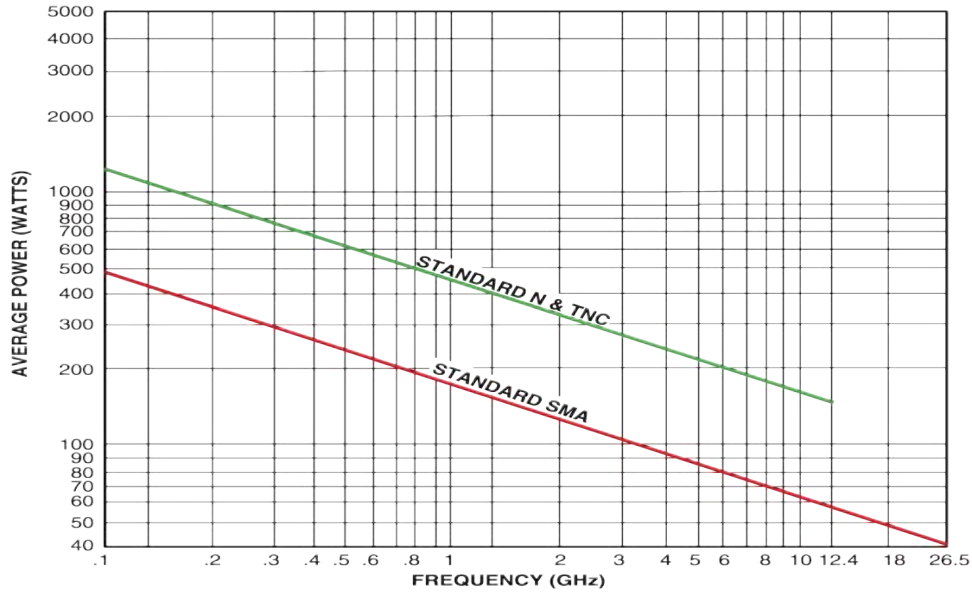

Power Handling Capability of Narda Switches vs. Frequency for Common RF Connectors (for 25°C ambient temperature, matched 50-ohm systems, sea level and cold switching)

For VSWR above 1.1:1, Derate Power Handling Capability as shown:

### VSWR Derating Factor

1.5:1	.94
2.0:1	.88
2.5:1	.83
3.0:1	.78
3.5:1	.73
4.0:1	.70